



KWC F5E-Mix
Electronic pillar mixer with battery operation

Modell-Linie: F5 | F5EM1007
Taps | Electronic taps



KWC-No.
2030027923
2030039427
with flow regulator 3.0 l/min

volume flow rate at 3 bar
0.08 l/s
0.05 l/s

F5E-Mix pillar mixer DN 15 for sanitary facilities, opto-electronically controlled. For connection to hot and cold water via hoses with integrated backflow preventer and strainers. Control electronics, solenoid valve cartridge, 6 V lithium battery (CR-P2) and sensor in all-metal housing, high-polished chromium-plated brass. Temperature lever with adjustable, turn-proof temperature stop as

well as conversion set for concealed mixing device. Aerator with integrated flow regulator 3.0 l/min. Activated water hygiene flushing 24 hours after last activation, safety switch-off with continuous reflection and saving of statistical data. With option for parameterization and communication via optional, bidirectional remote control.

Technical Data

with backflow preventer
calculation flow rate cold wat
calculation flow rate hot water
compatible A3000 open
default automatic hygiene flush
depressurised
with filter
functional principle
hygiene flushing
diameter nominal
inlet size
Locking mechanism
material fitting
minimum flow pressure
type of mixing
number of batteries
Parameterization
Pop-up waste set
power supply connection
power consumption
Type of power supply
protective system IP
with rosettes/cover plate

yes
0.07 l/s
0.07 l/s
no
24h after the last activity
no
yes
electronic self-closing
yes
DN 15
G 3/8
Top section, non-ceramic
brass
1 bar
yes
1
remote control
no
Battery 6 V
1.5 Voltampere
Battery
IP59K
no




KWC F5E-Mix
Electronic pillar mixer with battery operation

Modell-Linie: F5 | F5EM1007
Taps | Electronic taps

protective shutdown	yes
sound insulation	no
Spout	fixed
spout projection	125 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	yes
thermal disinfection	no
with transformer/power supply	no
type of batteries	CR-P2 Lithium battery 6V
type of mounting	tap hole
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	pillar tap
volume flow rate at 3 bar	0.05 l/s
water connection	hose (gland nut)
Accent colour	none
Basic colour	chrome-look (glossy)

Optional Accessories




Bidirectional remote control for electronic fittings F3 and F5

2030036654
ACEX9005




2-button remote control for fittings F3 and F5

2030036849
ACEX9004



Socket

2030040334
ACEX1001



Anti-twist protection for F5S

2030035383
ACXX1001



Theft-proof housing for aerator

2000104778



Aerator 1.8 l/min

2030041442



PURETHERM under-table thermostat

2030012758



KWC F5E-Mix
Electronic pillar mixer with battery operation


Modell-Linie: F5 | F5EM1007
Taps | Electronic taps

ZTAPS0005

ACXX1005

PURE0031

Spare Parts

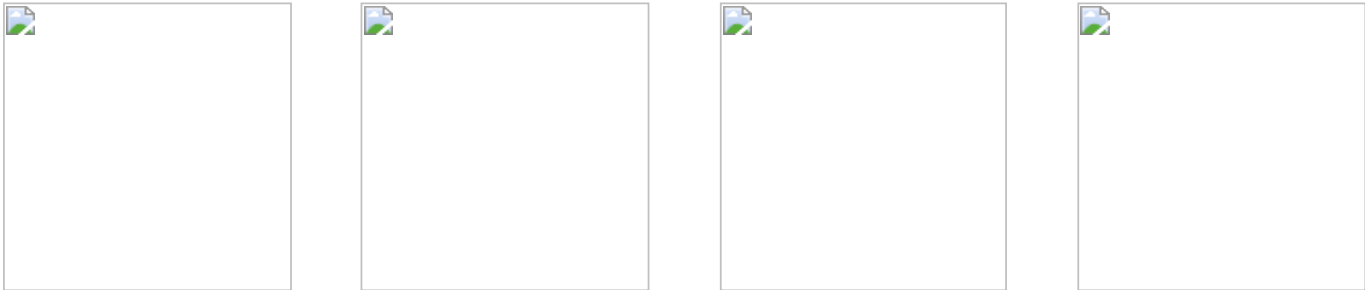


3.0 l/min. aerator
2030041424
ASXX1008

Cap
2030041558
ASEX1007

Plug red
2030041951
ASEX1009

Plug blue
2030041952
ASEX1010

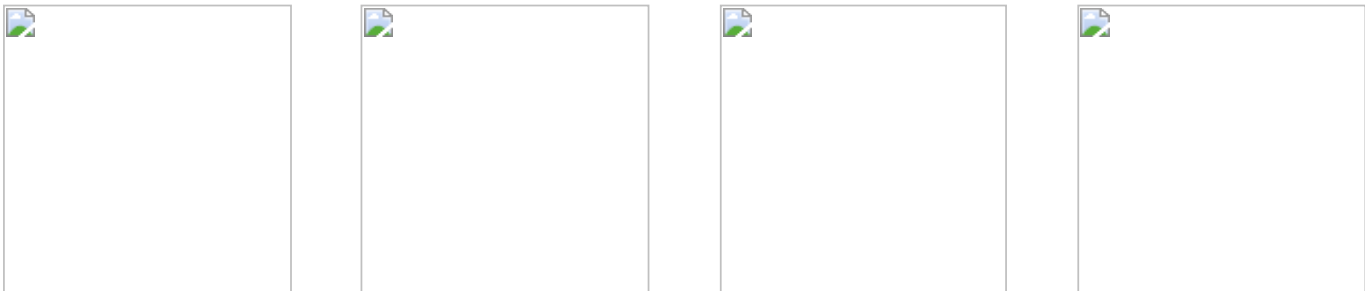


Lithium battery 6 V
2000104846
EPRTR0008

Solenoid valve cartridge
2030045522
ACXX9002

Temperature selection lever
2030041431
ASEM1001

Hose
2030041320
ASXM1001

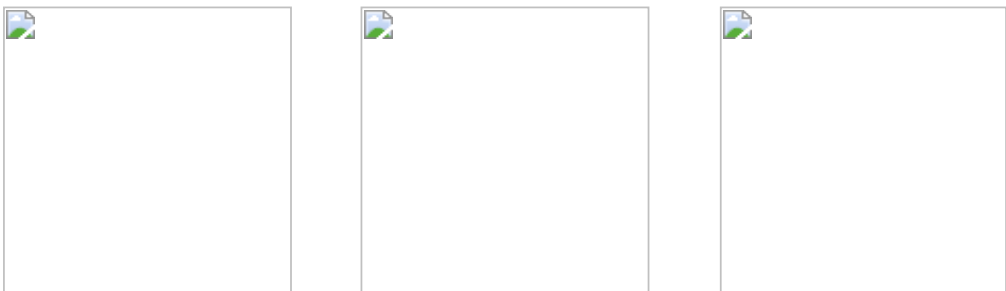

Quick-action fastener
2030043596
ASEX1013

Water way
2030041949
ASEX1008

Sensor, ID 01/00004
2030041458
ASEX1005