



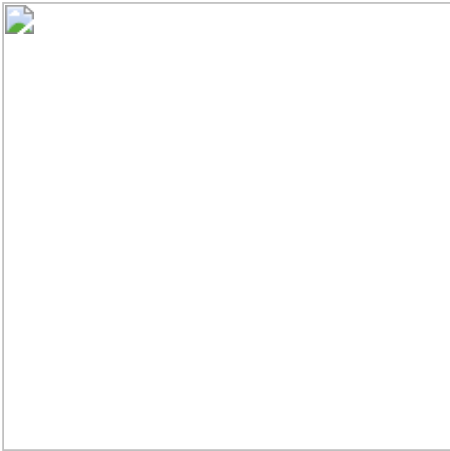

KWC F5E-Mix
Electronic washbasin mixer for fitting unit or wall flange

Modell-Linie: F5 | F5EM1015
Taps | Electronic taps

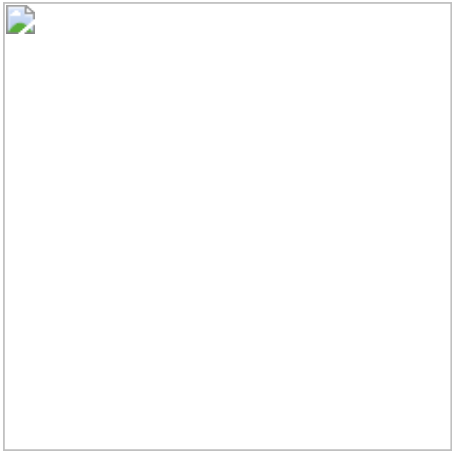

KWC-No.

2030058995
F5E-Mix Electronic washbasin mixer

F5E-Mix Washbasin mixer DN 15 with angled outlet for installation on fitting units or separate wall flanges, for sanitary facilities. Opto-electronic control, activation on hand reflection. For connection to hot and cold water. Control electronics, solenoid valve cartridge, 6 V lithium battery (CR-P2) and sensor in all-metal housing, high-polished chrome-plated brass. Temperature lever with adjustable, turn-proof temperature stop. Anti-theft aerator, SLIM design, with

integrated flow regulator 5.0 l/min. Connections positioned above one another with backflow preventers. Activated water hygiene flushing 24 hours after last activation, safety switch-off for continuous reflexion and saving of statistical data. With option for parameterization and communication via optional, bidirectional remote control.

Technical Data

with backflow preventer
compatible A3000 open
default automatic hygiene flus
depressurised
with filter
adjustable flow time
functional principle
hygiene flushing
diameter nominal
Locking mechanism
material fitting
minimum flow pressure
type of mixing
number of batteries
Parameterization
Pop-up waste set
power supply connection
Type of power supply
with rosettes/cover plate
protective shutdown
sound insulation
Spout
spout projection
surface finish fitting

yes
no
24h after the last activity
no
yes
yes
electronic self-closing
yes
DN 15
Top section, non-ceramic
brass-look
1 bar
yes
1
remote control
no
Battery 6 V
Battery
no
yes
no
fixed
110 mm
chromed




KWC F5E-Mix
Electronic washbasin mixer for fitting unit or wall flange

Modell-Linie: F5 | F5EM1015
Taps | Electronic taps

surface treatment fitting	polished
temperature limit	yes
thermal disinfection	automatic thermal disinfection
with transformer/power supply	no
type of batteries	CR-P2 Lithium battery 6V
type of mounting	mounted on product
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	for fitting unit
volume flow rate at 3 bar	0.08 l/s
water connection	plug connection
Accent colour	none
Basic colour	chrome-look (glossy)

Mandatory Accessories



Wall flange

2030058762
ACXM1002



Single clamping bridge

2030058826
ACXM1003

Double clamping bridge

2030059971
ACXM1004

Optional Accessories



Bidirectional remote control for
electronical fittings F3 and F5

2030036654
ACEX9005

2-button remote control for fittings F3
and F5

2030036849
ACEX9004

5.0 l/min aerator, angle-adjustable

2030041326
ACXX1002


3.0 l/min. aerator

2030041424
ASXX1008



KWC F5E-Mix
Electronic washbasin mixer for fitting unit or wall flange


Modell-Linie: F5 | F5EM1015
Taps | Electronic taps



Aerator 1.8 l/min


2030041442
ACXX1005

Spare Parts



Solenoid valve cartridge

2030045522
ACXX9002




Lithium battery 6 V

2000104846
EPRTR0008




F5 Foil

2030053034
ASET2010



Mounting key

2030041329
ACXX1003



Aerator 5.0 l/min

2030041011
ASXX1004




Guide bushing

2030023924
ETAPS0040



Temperature selection lever

2030041431
ASEM1001



Hexagonal socket wrench

2030047722
ACEX9011