
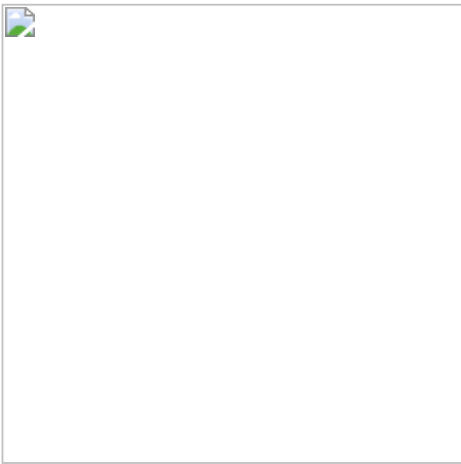


KWC  
F5LME hybrid kitchen fitting for hot water heater

Modell-Linie: F5 | F5LME002  
Umyvadlové armatury | Hydraulické armatury

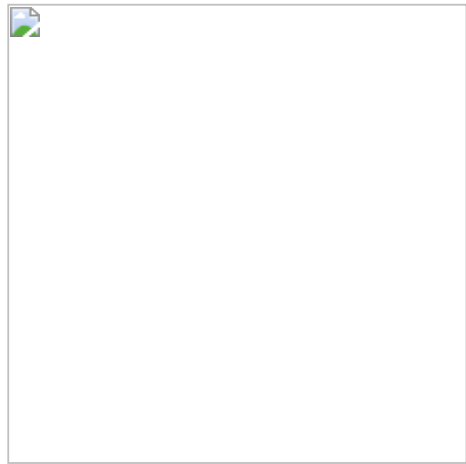

KWC-No.  
**2030061065**

F5LME hybrid kitchen fitting DN 15 as pillar mixer with swivelling spout, can be locked in the centre position. Adjustable swivel ranges of 50°, 120° and 360°. To the connection via hoses in open undercounter boilers. Single lever mixer with mixer cartridge with ceramic disc technology and adjustable, turn-proof temperature stop. Alternative activation using hand reflection via an opto-electronic sensor for time-controlled water release with preset mixing water temperature. Mixer cartridge, solenoid valve and sensor with control electronics in all-metal housing, brushed stainless steel. With beam shaper. Projection 220 mm. Activated water hygiene flushing 24 hours after last activation, safety switch-

off for continuous reflection and saving of statistical data. With option for parametrisation and communication via optional, bidirectional remote control. Optionally for battery operation with battery compartment including 6 V lithium battery (CR-P2) per fitting for installation under the kitchen sink or for separate power supply via 6.75 V/12 V DC power supply unit or AQUA 3000 open system accessories.  
  
Battery compartment including battery or power supply unit with extension cable must be ordered separately.

Technické údaje

Snížený tlak
ATT-WS-FILTER
Ovláddání
ATT-WS-HYGIENE-FLUSH
Nominální průměr
ATT-WS-LOCKINGMECHANISM
Materiál armatury
Minimální tlak průtoku
Typ směřování
ATT-WS-POPUPWASTESET
ATT-WS-ROSETTES
ATT-WS-SPOUT
Povrchová úprava armatury
ATT-WS-SURTREATFIT
Zakázkový
ATT-WS-TEMPERATURELIMIT
Termická dezinfekce
Způsob montáže
Ovláddání
Typ baterie
ATT-WS-WATCON

ano
ano
manuální
připraveno
DN 15
TOP-NONCERAMIC
mosaz
1.
ano
Ne
Ne
ROTATING-TOP
chromovaný
POLISHED
Ne
ano
ano
TAPHOLE
manuální
Pillar tap
hadice