





KWC

F5LME Hybrydowa armatura kuchenna do zasobnika wody

Modell-Linie: F5 | F5LME002

Armatura umywalkowa | Armatura jednouchwytowa

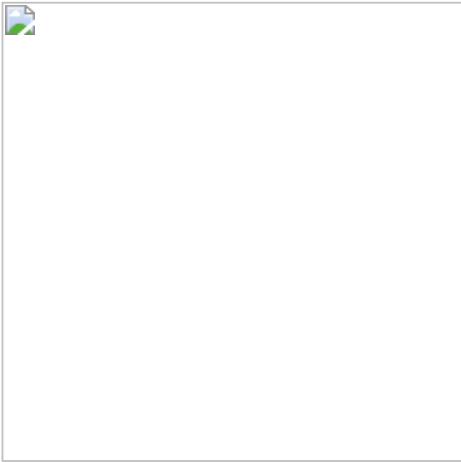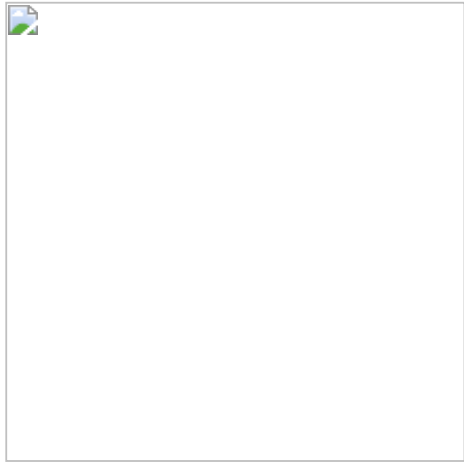

KWC-No.

2030061065

F5LME hybrid kitchen fitting DN 15 as pillar mixer with swivelling spout, can be locked in the centre position. Adjustable swivel ranges of 50°, 120° and 360°. To the connection via hoses in open undercounter boilers. Single lever mixer with mixer cartridge with ceramic disc technology and adjustable, turn-proof temperature stop. Alternative activation using hand reflection via an opto-electronic sensor for time-controlled water release with preset mixing water temperature. Mixer cartridge, solenoid valve and sensor with control electronics in all-metal housing, brushed stainless steel. With beam shaper. Projection 220 mm. Activated water hygiene flushing 24 hours after last activation, safety switch-

off for continuous reflection and saving of statistical data. With option for parametrisation and communication via optional, bidirectional remote control. Optionally for battery operation with battery compartment including 6 V lithium battery (CR-P2) per fitting for installation under the kitchen sink or for separate power supply via 6.75 V/12 V DC power supply unit or AQUA 3000 open system accessories.

Battery compartment including battery or power supply unit with extension cable must be ordered separately.

Dane techniczne

Bezciśnienowy
ATT-WS-FILTER
Zasada funkcjonowania
Płukanie higieniczne
Średnica nominalna
ATT-WS-LOCKINGMECHANISM
Materiał złączki
Wymagane ciśnienie robocze
Sposób mieszania
ATT-WS-POPUPWASTESET
ATT-WS-ROSETTES
ATT-WS-SPOUT
Wykończenie powierzchni
ATT-WS-SURTFREATFIT
ATT-WS-TAILMADE
ATT-WS-TEMPERATURELIMIT
Dezynfekcja termiczna
Rodzaj montażu
Rodzaj obsługi
Rodzaje baterii
ATT-WS-WATCON

Tak
Tak
Instrukcja
Dostosowany
DN 15
TOP-NONCERAMIC
Mosiądz
1.
Tak
Nie
Nie
ROTATING-TOP
Chromowany
POLISHED
Nie
Tak
Tak
Otwór na armaturę
Obsługa ręczna
Bateria stojąca
HOSE