
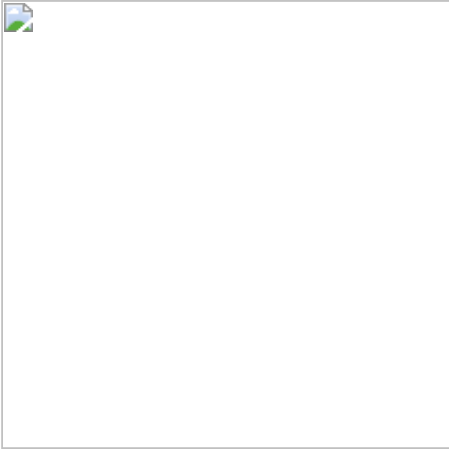


KWC
F4LT-Med thermostatic single-lever pillar mixer with pop-up waste set

Modell-Linie: F4 | F4LT1003
Taps | Manual taps

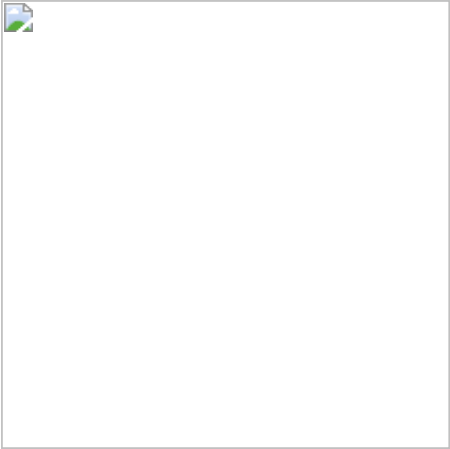

KWC-No.

2030067801

2030068120

With connection pipes

F4LT-Med thermostatic single lever mixer as DN 15 pillar mixer for sanitary facilities in the healthcare and nursing sectors, with 148 mm lever. Thermostat-controlled mixer cartridge with expansion element, integrated fail-safe against backflow, safety switch-off in case of cold-water failure, adjustable and turn-proof temperature stop, and ceramic disc technology. Without additional backflow preventer for optimised drinking water hygiene. Lever cap with an ergonomic bracket design and slight curvature in the front with basalt-grey coating, in

line with two-senses principle (tactile and visual). For connection to hot water and cold water via hoses, includes strainers. Tap optimised for cleaning, all-metal construction, polished chromium-plated low-lead brass (lead proportion = 0.2%), with volume-reduced water flow without nickel coating. Laminar jet controller with integrated flow rate controller 8.0 l/min, projection 135 mm. With chrome-plated pop-up waste set waste fitting kit G 1 1/4.

Technical Data

with backflow preventer
depressurised
with filter
functional principle
diameter nominal
inlet size
Locking mechanism
material fitting
minimum flow pressure
type of mixing
Pop-up waste set
with rosettes/cover plate
Spout
surface finish fitting
surface treatment fitting
tailor made
temperature limit
type of mounting
type of operation
type of tap

no
no
yes
manual
DN 15
G 3/8
Top section, non-ceramic
brass
1
with thermostat
yes
no
fixed
chromed
polished
no
yes
tap hole
manual operation
pillar tap




KWC

F4LT-Med thermostatic single-lever pillar mixer with pop-up waste set

Modell-Linie: F4 | F4LT1003
Taps | Manual taps

volume flow rate at 3 bar	0.13
water connection	hose (gland nut)

Optional Accessories



Anti-twist protection
2030041324
ACLM1009