




KWC

F4LT-Med thermostatic single-lever pillar mixer

Modell-Linie: F4 | F4LT1008

Kranar | Hydraulické armatury

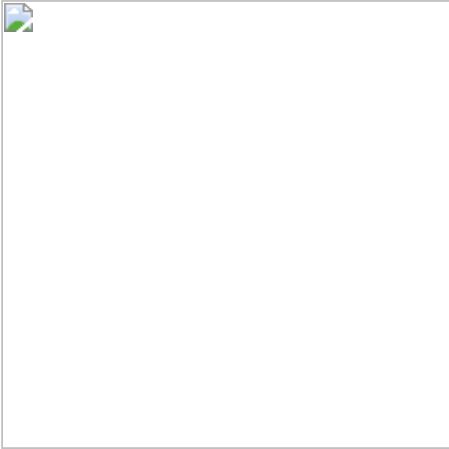

KWC-No.

2030066749

2030068119

With connection pipes

F4LT-Med thermostatic single lever mixer as DN 15 pillar mixer for sanitary facilities in the healthcare and nursing sectors, with 148 mm lever. Thermostat-controlled mixer cartridge with expansion element, integrated fail-safe against backflow, safety switch-off in case of cold-water failure, adjustable and turn-proof temperature stop, and ceramic disc technology. Without additional backflow preventer for optimised drinking water hygiene. Lever cap with an ergonomic bracket design and slight curvature in the front

with basalt-grey coating, in line with two-senses principle (tactile and visual). For connection to hot water and cold water via pipes, includes strainers. Tap optimised for cleaning, all-metal construction, polished chromium-plated low-lead brass (lead proportion ≤ 0.2%), with volume-reduced water flow without nickel coating. Laminar jet controller with integrated flow rate controller 8.0 l/min, projection 135 mm.

Technical Data

ATT-WS-BACKFLOWPREVENTER
Nedtryckt
ATT-WS-FILTER
Funktionell princip
Nominell diameter
Inbyggadsmått
ATT-WS-LOCKINGMECHANISM
Material delar
Minimalt flödestryck
Typ av blandning
ATT-WS-POPUPWASTESET
ATT-WS-ROSETTES
ATT-WS-SPOUT
yt finish
ATT-WS-SURTREATFIT
ATT-WS-TEMPERATURELIMIT
Typ av montering
Typ av operation
Typ av kran
ATT-WS-VOLFLOWRATE3
ATT-WS-WATCON

Nej
Nej
Ja
Manual
DN 15
G3-8
TOP-NONCERAMIC
Mässing
1
Med termostat
Nej
Nej
FIXED
Förkromad
POLISHED
Ja
TAPHOLE
Manull operation
PILLAR-TAB
0.13
PIPE



KWC
F4LT-Med thermostatic single-lever pillar mixer

Modell-Linie: F4 | F4LT1008
Kranar | Hydraulické armatury

Extratillbehör



Anti-twist protection

2030041324
ACLM1009