




KWC F5E
Electronic pillar tap with battery operation

Modell-Linie: F5E | F5EV1001
Taps | Electronic taps

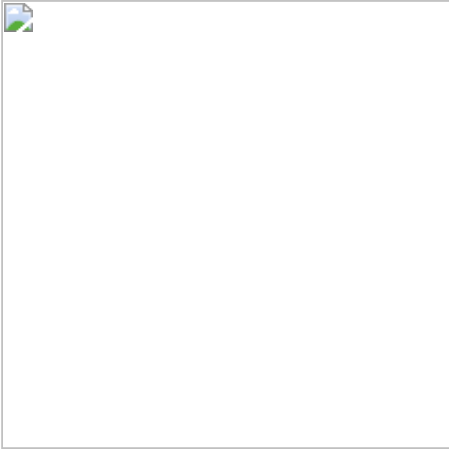

KWC-No.
2030027922
2030039435
with flow regulator 3.0 l/min

volume flow rate at 3 bar
0.08 l/s
0.05 l/s

F5E pillar tap DN 15 for sanitary facilities, opto-electronically controlled. For connection to pre-mixed hot or cold water via hose and strainer. Control electronics, solenoid valve cartridge, 6 V lithium battery (CR-P2) and sensor in all-metal housing, high-polished chromium-plated brass. Anti-theft aerator, design SLIM, with

integrated flow regulator 5.0 l/min. Activated water hygiene flushing 24 hours after last activation, safety switch-off with continuous reflection and saving of statistical data. With option for parameterization and communication via optional, bidirectional remote control.

Technical Data

with backflow preventer
calculation flow rate cold wat
compatible A3000 open
default automatic hygiene flus
depressurised
with filter
functional principle
hygiene flushing
diameter nominal
inlet size
Locking mechanism
material fitting
minimum flow pressure
type of mixing
number of batteries
Parameterization
Pop-up waste set
power supply connection
power consumption
Type of power supply
protective system IP
with rosettes/cover plate
protective shutdown
sound insulation

no
0.1 l/s
no
24h after the last activity
no
yes
electronic self-closing
yes
DN 15
G 3/8
Top section, non-ceramic
brass-look
1 bar
no
1
remote control
no
Battery 6 V
1.5 Voltampere
Battery
IP59K
no
yes
no



KWC F5E
Electronic pillar tap with battery operation

Modell-Linie: F5E | F5EV1001
Taps | Electronic taps

Spout	fixed
spout projection	125 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	no
thermal disinfection	no
with transformer/power supply	no
type of batteries	CR-P2 Lithium battery 6V
type of mounting	tap hole
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	pillar tap
volume flow rate at 3 bar	0.08 l/s
water connection	hose (gland nut)
Accent colour	none
Basic colour	chrome-look (glossy)

Optional Accessories



Bidirectional remote control for electronic fittings F3 and F5

2030036654
ACEX9005




2-button remote control for fittings F3 and F5

2030036849
ACEX9004




5.0 l/min aerator, angle-adjustable

2030041326
ACXX1002



3.0 l/min. aerator

2030041424
ASXX1008



Aerator 1.8 l/min

2030041442
ACXX1005




Socket

2030040334
ACEX1001



PURETHERM under-table thermostat

2030012758
PURE0031



Anti-twist protection for F5S


2030035383
ACXX1001



KWC F5E
Electronic pillar tap with battery operation

Modell-Linie: F5E | F5EV1001
Taps | Electronic taps

Spare Parts



Aerator 5.0 l/min

2030041011
ASXX1004




Cap

2030041558
ASEX1007




Plug red

2030041951
ASEX1009

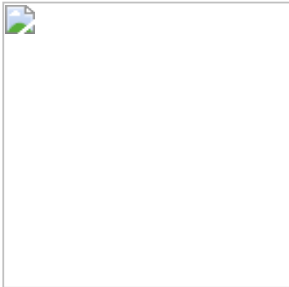

Plug blue

2030041952
ASEX1010

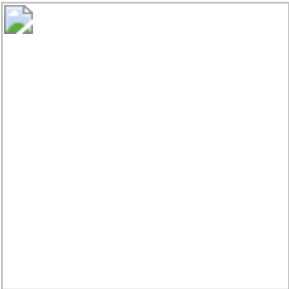


Lithium battery 6 V

2000104846
EPTR0008




Solenoid valve cartridge

2030045522
ACXX9002

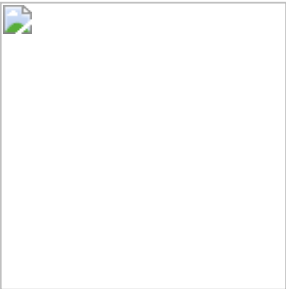


Hose

2030041311
ASXX1005



Quick-action fastener

2030043596
ASEX1013




Water way

2030041949
ASEX1008



Sensor, ID 01/00004

2030041458
ASEX1005

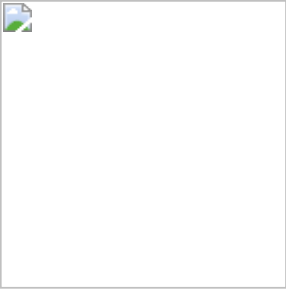

Mounting key

2030041329
ACXX1003